



Zertifiziertes
QM-System
DIN EN ISO 9001
Zertifikat-Nr. 01017

Vortex Flowmeter Compact for low viscous liquids



measuring
•
monitoring
•
analysing

DVZ



- Range:
0.5 - 4.5 ... 10 - 100 l/min
- Accuracy:
±2.5 % of full scale
- p_{max} : 20 bar; t_{max} : 80 °C
- Connections:
G 1/4 ... G 1, 1/4" NPT ... 1" NPT
- Connection material:
brass or stainless steel
- Output: switching output,
frequency output, analogue
output
- Compact, counter and
dosing electronics

GS



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



DVZ-...S300

DVZ-...F300
DVZ-...L303
DVZ-...L343

DVZ-...L443

DVZ-...L443
(usage with AUF-3000)

DVZ-...C3...
(compact electronics)

Description

The compact KOBOLD Vortex flowmeter Model DVZ is used for measuring and monitoring smaller and medium-sized flow of low viscosity, water-like liquids in pipes. The device works using the vortex principle, making it virtually maintenancefree. This involves the installation of a sharp-edged object (the vortex generator) in the flow duct. Vortices are created behind the object whose frequency is proportional to the velocity of flow of the liquid. The flow volume can be determined with a very great degree of accuracy by measuring the vortex frequency. This achieves a very high linearity over the whole measuring range.

The device can be fitted with switching, frequency or analogue outputs. There is also an optional compact electronics package that includes a digital display, and both a switching and analogue output.

The dosing and counter electronics is equipped with two switching outputs, one analogue output and a two-lined display.

Areas of Application

- Monitoring the flow of low viscosity liquids
- Measuring of aggressive, high-purity or salty solutions
- Unsuitable for abrasive media or media containing a large proportion of fibres

Technical Details

Measurement process: vortex principle
 Mounting position: any, flow in direction of arrow
 Accuracy: ±2.5 % of full scale
 Repeatability: ±1 % of full scale
 Inlet runs: 10 x DN / 2 x DN
 Media temperature: 0...80 °C
 Ambient temperature: -10...+60 °C
 Max. media viscosity: see table

Measur. range	Measuring range start point [l/min]					Max. viscosity
	1 cSt	1.5 cSt	2 cSt	4 cSt	7 cSt	
04	0.5	1.5	3.0	-	-	2 cSt
07	0.8	1.5	3.0	-	-	2 cSt
10	1.3	1.3	3.5	-	-	2 cSt
16	2.0	2.0	3.5	-	-	4 cSt
22	3.2	3.2	3.2	6.0	-	4 cSt
32	4.0	4.0	4.0	3.2	12.5	7 cSt
40	4.0	4.0	4.0	8.0	15.0	7 cSt
50	5.0	5.0	5.0	9.0	16.5	7 cSt
63	6.3	6.3	6.3	10.0	18.5	7 cSt
80	8.0	8.0	8.0	11.0	20.5	7 cSt
99	10.0	10.0	10.0	11.5	23.0	7 cSt

When using viscous media the decreased Reynolds number causes a displacement of the measuring range start point to higher values. The measuring range end points values however stays unchanged.

Max. pressure

Connection	fixed	rotatable
Standard version	10 bar	20 bar
Reinforced version	20 bar	-

Wetted parts

Sensor housing: PPS, fibreglass-reinforced
 Sensor: PVDF
 Connections: brass, up to 32 l/min nickel plated, from 40 l/min blank or stainless steel 1.4404
 Bluff body: PPS, fibreglass-reinforced or oxide ceramic (non-wear version)
 Seal: NBR, EPDM or FPM
 Response time: 1 s (at flow changes >10% FS)
 Protection: IP 65
 Weight: depending on version (see table)

Technical Details (continuation)

DVZ-...S300, DVZ-...S30D

Display: DUO-LED for switching condition and when range limit is exceeded

Switching output: relay change over, max. 1 A/30 V_{DC} or active 24 V_{DC}, N/C/N/O

Switch point: 10...90 % of full scale in 10 %-steps that can be configured by the customer using a rotary switch

Power supply: 24 V_{DC} ±20 %

Power consumption: 25 mA

Electrical connection: plug M12x 1.5 pole

Measuring range overflow: flash of the DUO-LED (green/red) from 105 % of full scale

DVZ-...F300, DVZ-...F390

Pulse output: PNP, Open Collector, max. 200 mA

Frequency at FS: 500 Hz (...F300)
50 ... 1000 Hz (...F390)

Power supply: 24 V_{DC} ±20 %

Power consumption: 5 mA

Electrical connection: plug M12x1

Measuring range overflow: F_{out} approx. 2 kHz from 105 % of f. s.

DVZ-...L303; DVZ-...L343

Output: 0(4)...20 mA, 3-wire

Max. load: 500 Ω

Power supply: 24 V_{DC} ±20 %

Electrical connection: plug M12x1

Measuring range overflow: I_{out} approx. 20.5 mA from approx. 103 % of full scale

DVZ-...L443 (usage with AUF-3000)

Output: 4...20 mA, 3-wire

Max. load: 500 Ω (250 Ω with AUF-3000)

Power supply: 24 V_{DC} ±20 %

Electrical connection: plug DIN 43650

Measuring range overflow: I_{out} approx. 20.5 mA from approx. 103 % of full scale

DVZ-...C3xx (Compact electronics)

Display: 3-digit LED

Analogue output: 0(4)...20 mA adjustable, max. 500 Ω (only for DVZ-...C34)

Switching output: 1 or 2 Open Collector PNP or NPN factory set, max. 300 mA

Contact function: N/C, N/O, frequency, programmable (frequency output not calibrated at f.s. approx. 500 - 600 Hz)

Programming: via 2 buttons

Power supply: 24 V_{DC} ±20 %, 3-wire technology


Power consumption: approx. 100 mA

Electrical connection: plug M12, 5 pole


Measuring range overflow: display "OF" from 105 % of full scale

Electrical Connections


DVZ-...S300

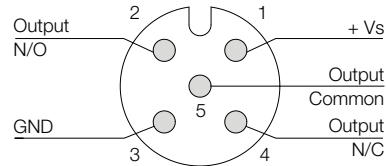


DVZ-...S30D

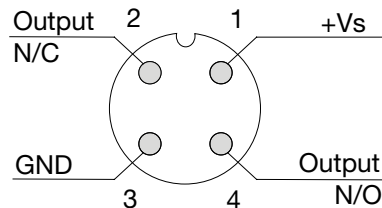


DVZ-...F300; DVZ-...L3x3

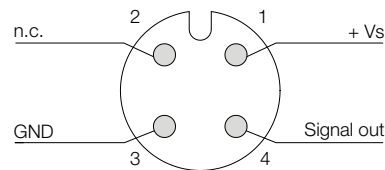


DVZ-...L443



DVZ-...C30x

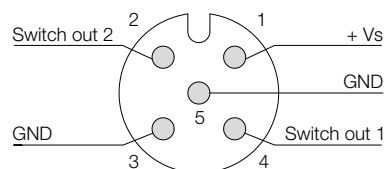

DVZ-...C34

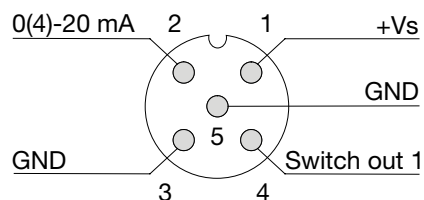

Technical Details (continuation)

DVZ-...Exxx (Counter electronics)

Display: LCD, 2 x 8 digit, illuminated total, part and flow quantities, units selectable

Quantity meter: 8-digit

Analogue output: 0(4)...20 mA adjustable

Load: max. 500 Ω

Switching output: 2 relays, max. 30 V_{AC/DC}/2 A/60 VA

Settings: via 4 buttons

Functions: reset, MIN /MAX memory, flow monitor, monitoring for part and total quantity, language

Power supply: 24 V_{DC} ±20 %, 3-wire technology

Power consumption: approx. 150 mA

Electrical connection: cable connection or M 12-plug

More technical details see data sheet ZED.

DVZ-...Gxxx (Dosing electronics)

Display: LCD, 2 x 8 digit, illuminated, dosing-, total-, and flow quantity, units selectable

Quantity meter: 8-digit

Dosage: 5-digit

Analogue output: 0(4)...20 mA adjustable

Load: max. 500 Ω

Switching output: 2 relays, max. 30 V_{AC/DC}/2 A/60 VA

Settings: via 4 buttons

Functions: dosing (relais S2), start, stop, reset, fine dosing, correction amount, flow switch, total quantity, language

Power supply: 24 V_{DC} ±20 %, 3-wire technology

Power consumption: approx. 150 mA

Electrical connection: cable connection or M 12-plug



More technical details see data sheet ZED.

DVZ-...E14R, DVZ-...G14R Cable connection

Wire number	DVZ-...E14R Counter electronics	DVZ-...G14R Dosing electronics
1	+24 V _{DC}	+24 V _{DC}
2	GND	GND
3	4-20 mA	4-20 mA
4	GND	GND
5	n.c.	Control 1*
6	reset part quantity	Control 2*
7	relay S1 open without current	relay S1 open without current
8		
9	relay S2 open without current	relay S2 open without current
10		

Control 1 <-> GND: Start-dosing
 Control 2 <-> GND: Stop-dosing
 Control 1 <-> Control 2 <-> GND: Reset-dosing

Plug connection

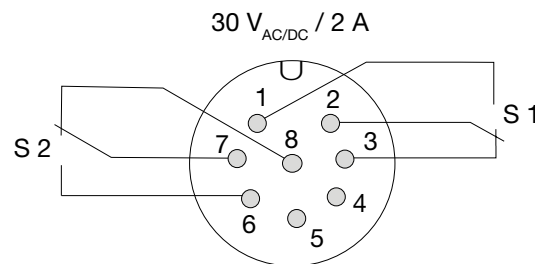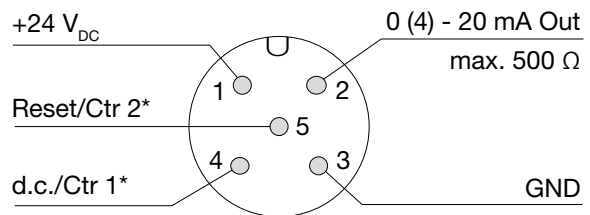

Weight sensor

Measuring range	Size	Connection fixed	Connection reinforced	Connection turnable
up to 32 l/min	¼", ⅜", ½"	approx. 450 g	approx. 600 g	approx. 800 g
up to 32 l/min	¾"	approx. 600 g	approx. 600 g	approx. 900 g
up to 32 l/min	1"	approx. 1050 g	approx. 950 g	approx. 950 g
40...100 l/min	¾"	approx. 1050 g	approx. 1300 g	approx. 1350 g
40...100 l/min	1"	approx. 900 g	approx. 1150 g	approx. 1400 g

Weight electronic

Model	Weight
DVZ-...F3x0 DVZ-...S30x DVZ-...Lxx3	approx. 80 g
DVZ-...C3xx	approx. 300 g
DVZ-...Exxx DVZ-...Gxxx	approx. 250 g

Total weight = weight sensor + weight electronic



Order Details (Example: DVZ-1 1 04 G2 S300)

Storage body	Connection/ seal	Measuring range	Connections		Electronics
			fixed	rotatable	
DVZ-1.. = PPS DVZ-2.. = ceramic DVZ-3..* = PPS/ reinforced version DVZ-4..* = ceramic/ reinforced version	..1..= brass/ NBR ..2..= st. steel/ NBR ..4..= brass/ EPDM ..5..= st. steel/ EPDM ..7..= brass/ FPM ..8..= st. steel/ FPM	..04.. = 0.5-4.5 l/min ..07.. = 0.8-6.5 l/min ..10.. = 1.3-10.0 l/min	..G2.. = G ¼ ..G3.. = G ⅜ ..G4.. = G ½ ..N2.. = ¼" NPT ..N3.. = ⅜" NPT ..N4.. = ½" NPT	..B2.. = G ¼ ..B3.. = G ⅜ ..B4.. = G ½ ..P2.. = ¼" NPT ..P3.. = ⅜" NPT ..P4.. = ½" NPT	Switching output ..S300 = M12-plug, relay ..S30D = active 24 V _{DC} , M12-plug Frequency output ..F300 = M12-plug, 500 Hz ..F390 = M12-plug, 50...1000 Hz Analogue output ..L303 = M12-plug, 0-20 mA ..L343 = M12-plug, 4-20 mA ..L443 = DIN-plug, 4-20 mA Compact electronics** ..C30R = 2xOpen Coll., PNP ..C30M = 2xOpen Coll., NPN ..C34P = 4-20 mA, 1 xOpen Coll., PNP ..C34N = 4-20 mA, 1 xOpen Coll., NPN Counter electronics ..E14R = LCD, 0(4)-20 mA, 2 x relays, 1 m cable ..E34R = LCD, 0(4)-20 mA, 2 x relays, M 12-plug Dosing electronics ..G14R = LCD, 0(4)-20 mA, 2 x relays, 1m cable ..G34R = LCD, 0(4)-20 mA, 2 x relays, M 12-plug
		..16.. = 2.0-16.0 l/min	..G3.. = G ⅜ ..G4.. = G ½ ..G5.. = G ¾ ..N3.. = ⅜" NPT ..N4.. = ½" NPT ..N5.. = ¾" NPT	..B3.. = G ⅜ ..B4.. = G ½ ..B5.. = G ¾ ..P3.. = ⅜" NPT ..P4.. = ½" NPT ..P5.. = ¾" NPT	
		..22.. = 3.2-22.0 l/min ..32.. = 4.0-32.0 l/min	..G4.. = G ½ ..G5.. = G ¾ ..G6.. = G 1 ..N4.. = ½" NPT ..N5.. = ¾" NPT ..N6.. = 1" NPT	..B4.. = G ½ ..B5.. = G ¾ ..B6.. = G 1 ..P4.. = ½" NPT ..P5.. = ¾" NPT ..P6.. = 1" NPT	
		..40.. = 4.0-40 l/min ..50.. = 5.0-50 l/min ..63.. = 6.5-63 l/min ..80.. = 8.0-80 l/min ..99.. = 10.0-100 l/min	..G5.. = G ¾ ..G6.. = G 1 ..N5.. = ¾" NPT ..N6.. = 1" NPT	..B5.. = G ¾ ..B6.. = G 1 ..P5.. = ¾" NPT ..P6.. = 1" NPT	

* Reinforced version only in combination with fixed connection

**Please specify flow direction in the order


Pressure Loss at Range End Value

Model	Measuring range end value [l/min]	Pressure loss [mbar]
DVZ-__04	4.5	420
DVZ-__07	6.5	650
DVZ-__10	10.0	780
DVZ-__16	16.0	600
DVZ-__22	22.0	450
DVZ-__32	32.0	370
DVZ-__40	40.0	450
DVZ-__50	50.0	400
DVZ-__63	63.0	380
DVZ-__80	80.0	400
DVZ-__99	100.0	350

Dimensions [mm]


DVZ sensor with fixed connection

Measuring range up to 32 l/min

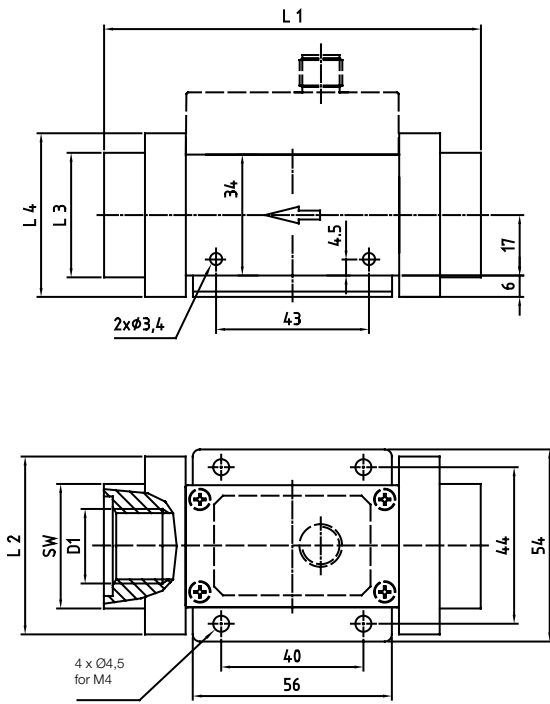

DVZ sensor with fixed connection


Measuring range from 40 l/min

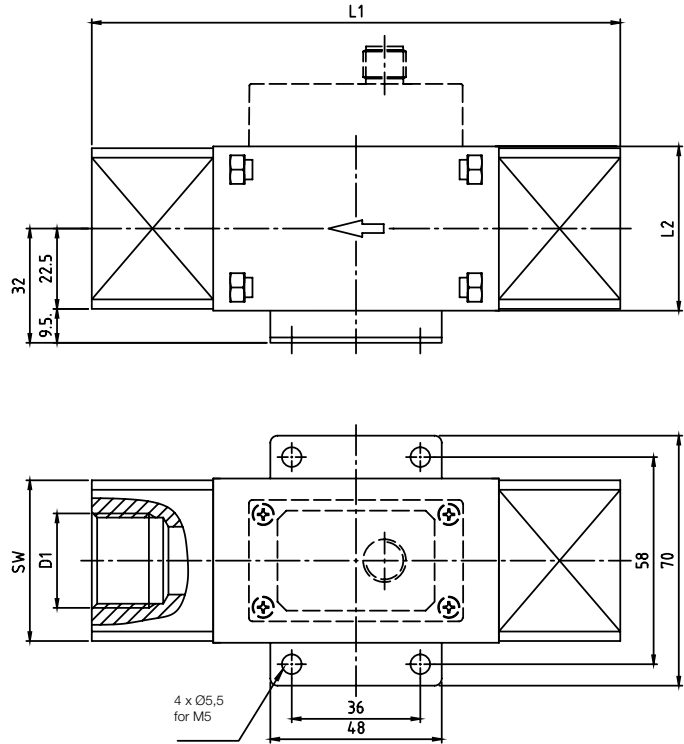

MB	..04 / ..07 / ..10	..04 / ..07 / ..10 / ..16	..04 / ..07 / ..10 / ..16 / ..22 / ..32	..16 / ..22 / ..32	..22 / ..32	..40 - ..99	..40 - ..99
D1	¼"	⅝"	½"	¾"	1"	¾"	1"
SW	35	35	35	34	-	45	45
L1	100	100	106	120	128	148	148
L2	-	-	-	50	50	46	46
L3	35	35	35	34	-	-	-
L4	-	-	-	-	46	-	-


DVZ sensor with reinforced connection

Measuring range up to 32 l/min

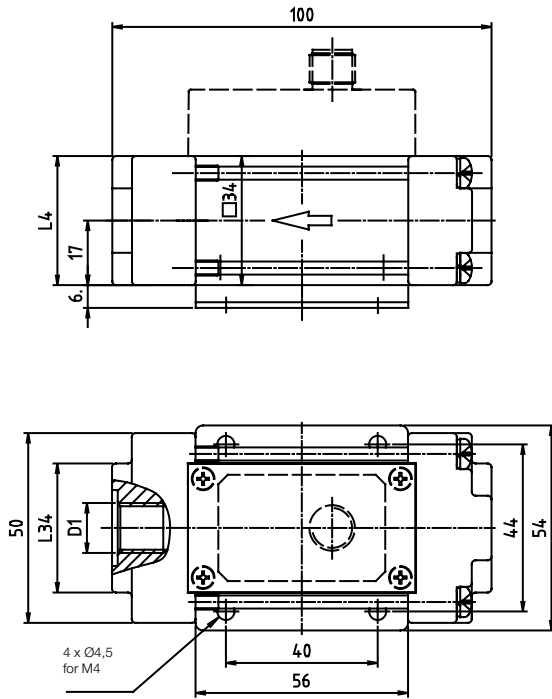

DVZ sensor with reinforced connection


Measuring range from 40 l/min

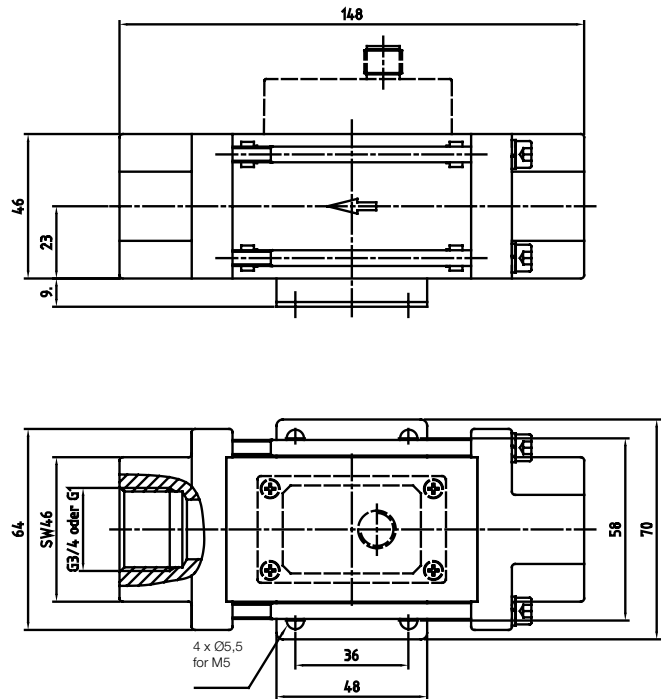

MB	..04 /..07 /..10	..04 /..07 /..10 /..16	..04 /..07 /..10 / ..16 /..22 /..32	..16 /..22 /..32	..22 /..32
D1	1/4"	3/8"	1/2"	3/4"	1"
SW	34	34	34	34	-
L1	100	100	106	120	128
L4	34	34	34	34	46


DVZ sensor with turnable connection

Measuring range up to 32 l/min

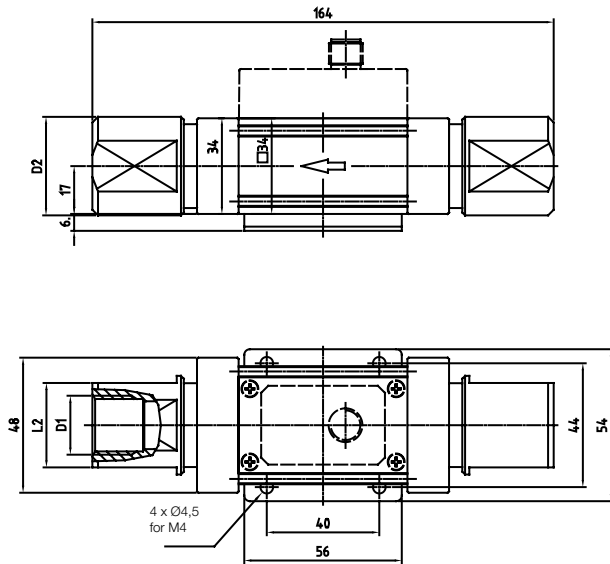


DVZ sensor with turnable connection

Measuring range from 40 l/min

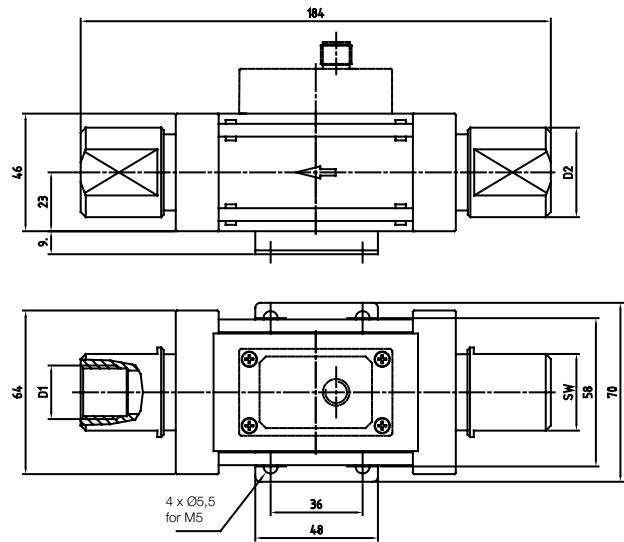


MB	..04 / ..07 / ..10	..04 / ..07 / ..10 / ..16	..04 / ..07 / ..10 / ..16 / ..22 / ..32	..16 / ..22 / ..32	..22 / ..32	..40 / ..50 / ..60 / ..80 / ..99	..40 / ..50 / ..60 / ..80 / ..99
D1	1/4"	3/8"	1/2"	3/4"	1"	3/4"	1"
D2	24	28	35	40	45	40	45
SW	19	24	30	36	41	36	41


DVZ-...S30x, DVZ-...F3x0, DVZ-...L3x3

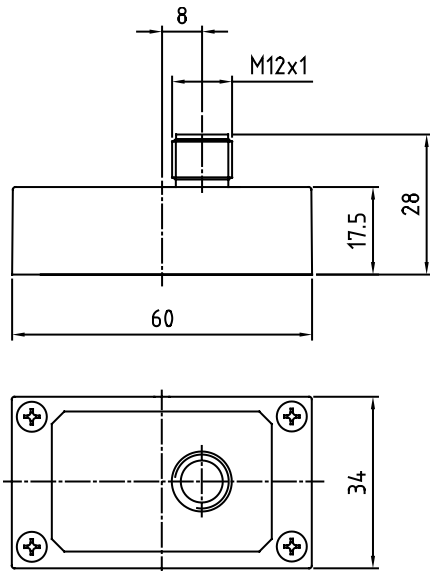

DVZ-...L443

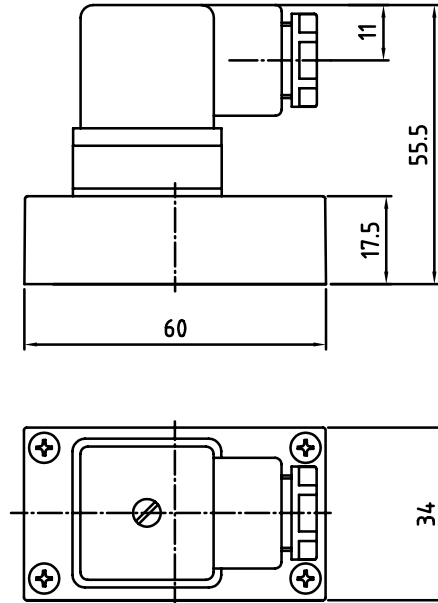

DVZ-...C3xx

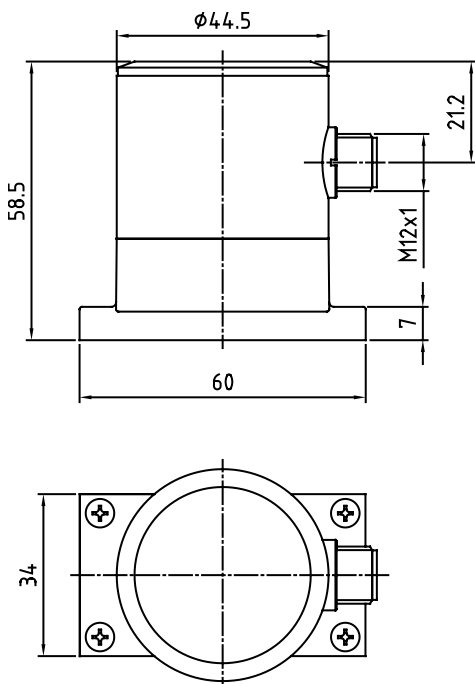

DVZ-...Exxx, DVZ-...Gxxx

