


Bypass Level Indicators

NBK-03/-06/-07/-10/
-31/-32/-33

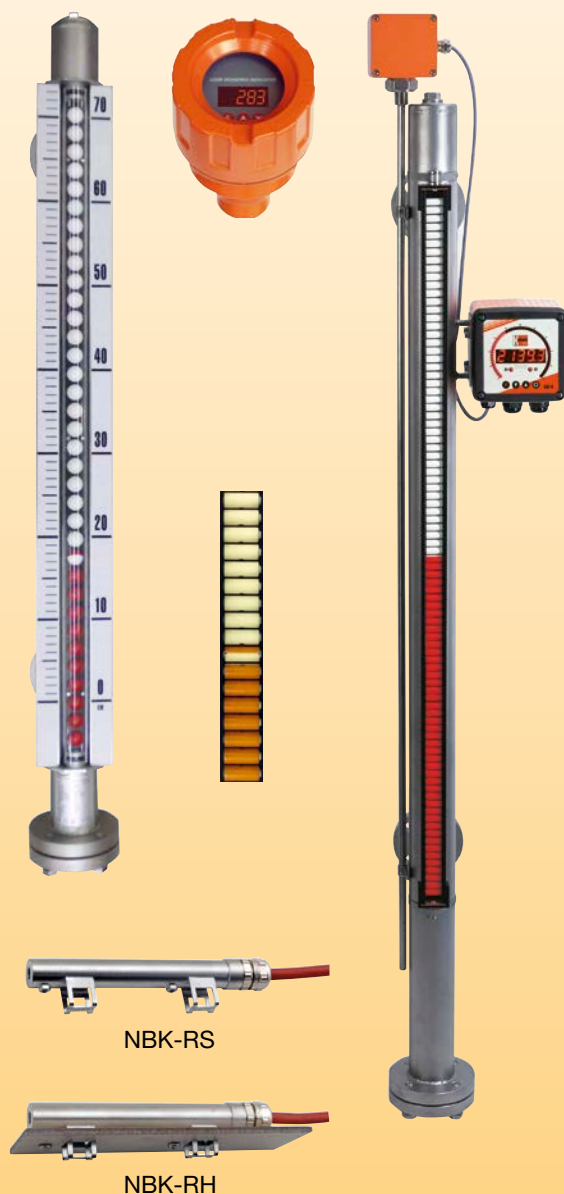

- Measuring length:
single-part max. 5500 mm
over 5500 mm two-part or multipart
- Pressure: max. PN320
- Temperature:
-40 ... +400 °C (ceramic rollers)
-20 ... +120 °C (POM-rollers)
-104 ... +200 °C; (ball display)
-60 ... +100 °C; (high pressure)
- Viscosity: max. 200 mm²/s standard
(Option: 460 mm²/s, only NBK-03)
- Connection:
DIN flange DN 15 ... DN 50
ANSI flange ½" ... 2"
R and NPT threads
welding nipple DN 15 ... DN 32
- Material: stainless steel 1.4571
- Insensitive magnet roller or
ball display without auxiliary energy
- Limit contacts
- Analogue output, HART®

N2



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY,
GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS,
PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY,
USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



Description

Kobold bypass level indicators are used for continuous measurement, display and monitoring of liquid levels. The bypass tube is attached onto the side wall of the vessel.

According to the law of communicating tubes the level in the bypass tube equals the level in the vessel. A float with embedded circular magnets in the bypass tube follows the liquid level and transfers it in a non-contacting manner to a display fitted outside the tube or to a monitoring device.

The following indication and monitoring devices are available:

Magnetic roller/ball indicator

As the float passes by, the red/white* rollers/balls are rotated in succession by 180° around their own axes. The rollers/balls change from white to red as the level rises and from red to white as the level falls. The advantage of ball display is the higher protection category, good visibility of 180° and higher vibration resistance with filled version. The level in a tank or a mixer is continuously displayed as a red column, even when the power fails.

* ceramic rollers in orange/beige

Transmitter

To remotely transmit the level a transmitter with a chain of resistors or a magnetostrictive transducer can be mounted outside the bypass tube. A continuous standard signal of 4...20 mA is generated by means of a fitted transmitter. This standard signal can then be displayed on analogue or digital indicating devices. Optionally, HART® communication protocol is possible.

Universal indicating unit

A universal indicating unit of type series ADI can be mounted on the bypass to display and evaluate the standard signal (4...20 mA) generated by the transmitter.

Limit contacts

One or more reed contacts for limit-value acquisition or also for level control can be secured to the bypass tube.

Applications

- Storage tanks
- Tanks on ships
- Agitator vessel
- Water tanks

Technical Details

Process connection:	flange DIN EN1092-1 type 11, forme B DN 15, DN 20, DN 25, DN 32, DN 40, DN 50, flange ASME B 16.5 RF-2009 ½", ¾", 1", 1¼", 1½", 2" R-thread DIN EN 10226-1 ½", ¾", 1", 1¼" NPT ANSI/ASME B1.20.1 ½", ¾", 1", 1¼"
Bypass tube:	Ø 60.3 mm, 1.4571 (NBK-03/.../10) Ø 71.0 mm, 1.4571 (NBK-31) Ø 76.1 mm, 1.4571 (NBK-32/33) flat gasket: <200 °C; PTFE, ≥200 °C, Klinger SIL® reinforced graphite RTJ-seal
NBK-03/06/07:	
NBK-10:	
NBK-31/32/33:	
Operating pressure:	PN 16/40/63/100/160/250/320
Temperature of medium:	-20...+120 °C (POM-rollers) -40...+400 °C (ceramic rollers) -104...+200 °C (ball display) -60...+100 °C (NBK-31, -32, -33)
Viscosity:	max. 200 mm²/s standard (Option: up to max. 460 mm²/s for NBK-03)
max. meas. length:	to 5 500 mm single-part; longer two-part or multipart
Overall length:	see dimension drawing
ATEX-approval:	see separate description

Roller display RP (max. length 5 500 mm)

Material roller:	POM
Display glass:	PMMA
Carrier frame material:	aluminium, black anodised
Temperature of medium:	-20...+120 °C
Ambient temperature:	-20...+80 °C
Protection:	IP 54

Roller display RK (max. length 5 500 mm)

Material roller:	ceramic
Display glass:	borosilicate glass
Carrier frame material:	aluminium, black anodised
Temperature of medium:	-40...+400 °C
Ambient temperature:	-40...+250 °C
Protection:	IP 54

**Ball display model KP (max. L = 3800 mm one-piece)**

Material ball:	PA
Sight tube:	PMMA
Sealing plug:	aluminium
Seal:	NBR
Ball support rail:	aluminium, black anodised
Carrier frame:	stainless steel 1.4301
Scale:	Hard-PVC, stainless steel 1.4301 (Option MV)
Temperature of medium:	-20 ... +80 °C
Ambient temperature:	-20 ... +80 °C
Protection:	IP 66

Ball display model KM (max. L = 3800 mm one-piece)

Material ball:	PA – high temperature strength
Sight tube:	PC
Sealing plug:	aluminium
Seal:	FPM
Ball support rail:	aluminium, black anodised
Carrier frame:	stainless steel 1.4301
Scale:	Hard-PVC, stainless steel 1.4301 (Option MV)
Temperature of medium:	-60 ... +120 °C
Ambient temperature:	-20 ... +80 °C
Protection:	IP 66

Ball display model KF (max. L = 3800 mm one-piece)

Filling:	silicone oil
Material ball:	PA – high temperature strength
Sight tube:	PC
Sealing plug:	stainless steel 1.4301
Seal:	FKM
Ball support rail:	aluminium, black anodised
Carrier frame:	stainless steel 1.4301
Scale:	Hard-PVC, stainless steel 1.4301 (Option MV)
Temperature of medium:	-105 ... +120 °C
Ambient temperature:	-20 ... +80 °C
Protection:	IP 66

Ball display model KG (max. L = 3000 mm one-piece)

Material ball:	PA – high temperature strength
Sight tube:	borosilicate glass
Sealing plug:	stainless steel 1.4301
Seal:	FKM
Ball support rail:	aluminium, black anodised
Carrier frame:	stainless steel 1.4301
Scale:	stainless steel 1.4301
Temperature of medium:	-20 ... +200 °C
Ambient temperature:	-20 ... +200 °C
Protection:	IP 66

* In case of multi-part design, a display (ball) length of 32 mm is not readable

Technical Details additional Features**Limit contacts, model NBK-R**

Contact operation:	bistable changeover contact
Switching hysteresis:	approx. 15 mm
Max. switching capacity:	60 W/VA, 230 V _{AC/DC} , 1 A
Resistance:	100 mΩ
Medium temperature:	-40 ... +100 °C
Ambient temperature:	-40 ... +75 °C
Connection:	3 m PVC-cable
Housing:	polycarbonate
Protection:	IP 67

Limit contact model NBK-RS/ NBK-RH

Contact operation:	bistable changeover contact
Switching hysteresis:	approx. 15 mm
Max. switching capacity:	230 V _{AC/DC} , 1 A, 60 W/VA
Resistance:	approx. 100 mΩ
Ambient temperature:	NBK-RS -40 ... +100 °C NBK-RH -40 ... +100 °C *
Medium temperature:	NBK-RS -40 ... +120 °C NBK-RH -40 ... +350 °C *
Cable connection:	silicone cable, colour coded 4Gx1 mm ²
Cable gland:	M16x1.5 brass
Housing:	stainless steel 1.4301
Protection:	IP 67

* Max. ambient temperature at medium temperature +350 °C = +60 °C
(No insulation of limit contact housing)

Limit contact model NBK-RV200NO

Sensor type:	reed contact
Switching pattern:	normally open, bistable
Switching hysteresis:	approx. 7 mm
Medium temperature:	-104 ... +200 °C
Ambient temperature:	-40 ... +70 °C
max. housing temperature:	+80 °C
max. operating voltage U _{max} :	75 V _{DC} / 50 V _{AC}
max. load current I _{max} :	0.5 A
max. switching power P _{max} :	5 W
Housing:	aluminium pressure-cast
Electrical connection:	terminal connection, cable gland M20x1.5 (PA) Cable clamping range 6 -13 mm
Protection:	IP 65

Take into account that none of the three parameters U_{max}, I_{max}, P_{max} may be exceeded!

Limit contact model NBK-RV200NC

Sensor type:	reed contact
Switching pattern:	normally closed, bistable
Other parameters:	exactly as for NBK-RV200NO



Limit contact model NBK-RN200NO

Sensor type: NAMUR contact
Switching pattern: normally open, bistable
max. operating voltage
 $U_{\max}$: 15 V_{DC}
 R_{on} : 1 k Ω
 R_{off} : 11 k Ω
Other parameters: exactly as for NBK-RV200NO

Limit contact model NBK-RN200NC

Sensor type: NAMUR contact
Switching pattern: normally closed, bistable
Other parameters: exactly as for NBK-RV200NO

Reed contact resistor chain model: ...W...

Total resistance: 0.7 ... 7 k Ω
Meas. circuit voltage: max. 24 V_{DC}
Measuring current: max. 0.1 A
max. length: 5500 mm
Medium temperature: -40 ... +200 °C,
-40 ... +400 °C with thermal
screening (option N)
Ambient temperature: max. 130 °C
Resolution: 10 mm
Housing: aluminium pressure-cast
Protection: IP65

Reed contact resistor chain with 2-wire transmitter model: ...M

Output: 4 ... 20 mA
Supply voltage: 16 ... 32 V_{DC}
max. length: 5500 mm
Load resistance: ($V_{\text{supply}} - 9 \text{ V}$) / 0.02 A [Ω]
Medium temperature: -40 ... +120 °C
Ambient temperature: -20 ... +80 °C
Resolution: 10 mm
Housing: aluminium pressure-cast
Protection: IP65

Reed contact resistor chain with 2-wire transmitter: 4 ... 20 mA Option MS

Like model: ...M... however with 100 mm
thermal stand-off of connection
head incl. thermal screening
Medium temperature: -40 ... +300 °C

Reed contact resistor chain with 2-wire transmitter: 4 ... 20 mA Option MK

Like model: ...M... however with 5000 mm
silicone cable between connection
box/bypass,
incl. thermal screening
Medium temperature: -40 °C ... +400 °C

Magnetostrictive sensor with 4-wire transmitter: 4 ... 20 mA model: ...T...

Output: 4 ... 20 mA
Supply voltage: 24 V_{DC}, max. 150 mA
Load: max. 500 Ω

max. length: 4000 mm
Medium temperature: -40 ... +120 °C
Ambient temperature: -20 ... +80 °C
Resolution ***: ± 1 mm
Accuracy****: 5 mm
Housing: aluminium pressure-cast
Protection: IP65

Magnetostrictive sensor

with 2-wire transmitter 4 ... 20 mA model: ...D/J...

Output: 4 ... 20 mA
Supply: 12.5 ... 36 V_{DC}
max. length: 3500 mm
Medium temperature*: -40 ... +90 °C
Ambient temperature: -40 (-25**) ... +70 °C
Resolution ***: ± 1 mm
Accuracy****: 5 mm
(see separate data sheets for probe types NMB)

* see temperature diagram

** with display

Magnetostrictive sensor

with 2-wire transmitter 4 ... 20 mA model: ...I...

Output: 4 ... 20 mA
Supply: 12.5 ... 36 V_{DC}
max. length: 3500 mm
Medium temperature: -40 ... +90 °C
Ambient temperature: -40 ... +70 °C
Resolution ***: ± 1 mm
Accuracy****: 5 mm
(see separate data sheets for probe types NMS)

*** for displayed and HART® transmitted values

****under reference conditions and with factory setting, with factory calibrated float for NBK

Reed contact resistor chain with 2-wire transmitter: 4 ... 20 mA model A (only with display options AE or AC)

Transmitter model: 5333D

Common specifications:

Power supply: 8.0 ... 35 V_{DC}
Communication interface: Loop Link
Linear resistance input: 0 ... 10 k Ω

Current output:

Signal range: 4 ... 20 mA
Min. signal range: 16 mA
Updating time: 135 ms
Load resistance: $\leq (V_{\text{supply}} - 8 \text{ V}) / 0.023 [\Omega]$

Sensor error detection:

Programmable: 3.5 ... 23 mA
(23 mA factory default)
Medium temperature: -40 ... +120 °C
(with option N up to +250 °C)

Ambient temperature: -20 ... +80 °C
Resolution: 10 mm
Housing: aluminium pressure-cast
Cable entry: M 20 x 1.5
Protection: IP66

LED or LCD display (options AE/AC):

Power supply: loop powered
 Voltage: LED 3.3 V at 4 mA
 3.7 V at 20 mA
 LCD max. 2.5 V

**Reed contact resistor chain with 2-wire transmitter:
 4...20 mA HART® model H and display options
 HE or HC**

Transmitter model: 5337D

Common specifications:

Power supply: 8.0...35 V_{DC}
 Communication interface: Loop Link 5905A and HART®
 Linear resistance input: 0...7 kΩ

Current output:

Signal range: 4...20 mA
 Min. signal range: 16 mA
 Updating time: 440 ms
 Load resistance: $\leq (V_{\text{supply}} - 8\text{V}) / 0.023 [\Omega]$

Sensor error detection:

Programmable: 3.5...23 mA
 (23 mA factory default)
 Medium temperature: -40...+120 °C (with option N)
 up to +250 °C
 Ambient temperature: -20...+80 °C
 Resolution: 10 mm
 Housing: aluminium pressure-cast
 Cable entry: M 20 x 1.5
 Protection: IP 66








LED or LCD display (Options HE/HC):





Power supply: Loop powered
 Voltage drop: LED 3.3 V at 4 mA
 3.7 V at 20 mA
 LCD max. 2.5V





Options

Code	Description	Sketch/picture	Availability
Top bypass tube connections			
V0	Without vent plug		for NBK-03/06/07, Standard for NBK-10/31/32/33
VG	With vent plug G ½ (DIN-flanges) ½" NPT (ASME-flanges)		for NBK-10/31/32/33, Standard for NBK-03/06/07
VF ^{1) 3)}	Flange connection DN50 (pressure rating as process flange)		NBK-03/06/07/10
VA ^{1) 3)}	Flange connection 2" ASME (pressure rating as process flange)		NBK-03/06/07/10
V4 ³⁾	Vent flange DN15, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
V5 ³⁾	Vent flange DN20, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
V6 ³⁾	Vent flange DN25, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
V7 ³⁾	Vent flange ½" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
V8 ³⁾	Vent flange ¾" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
V9 ³⁾	Vent flange 1" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
K3	Vent ball valve KUG-ZER15, G½ female, max. 180 °C		NBK-03/06/07
K2	Vent ball valve KUG-ZEN15, ½" NPT female, max. 180 °C		NBK-03/06/07
V2	vent valve NAD-MMN15, ½" NPT, stainless steel 316Ti, max. temperature: +120 °C		NBK-03/06
V3	Vent valve NAD-MMR15, G ½, stainless steel 1.4571, max. temperature: +120 °C		NBK-03/06
Bottom bypass tube connections			
D0	Without drain plug		for NBK-03/06/07 Standard for NBK-10/31 ... 33
DG	With drain plug G ½ (DIN-flanges) ½" NPT (ASME-flanges)	NBK-03/06  NBK-07/10	for NBK-10/31/32/33 Standard for NBK-03/06/07
DF	Flange connection DN50 (pressure rating as process flange), with drain plug G ½		NBK-03/06
DA	Flange connection 2" ASME (pressure rating as process flange), with drain plug ½" NPT		NBK-03/06
DC	Flange connection DN50 (pressure rating as process flange), without drain plug		NBK-03/06/07
DD	Flange connection 2" ASME (pressure rating as process flange), without drain plug		NBK-03/06/07
EF	Drain flange DN15, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
E5	Drain flange DN20, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
E6	Drain flange DN25, stainless steel 1.4571 (pressure rating as process flange)		NBK-03/06
E7	Drain flange ½" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
E8	Drain flange ¾" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
E9	Drain flange 1" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06

Code	Description	Sketch/picture	Availability
B3	Drain ball valve KUG-ZER15, G½ female, max. 180 °C		NBK-03/06/07
B2	Drain ball valve KUG-ZEN15, ½" NPT female, max. 180 °C		NBK-03/06/07
F1	Drain valve NAD-MMR15, G ½, stainless steel 1.4571, max. temperature: +120 °C		NBK-03/06
F2	Drain valve NAD-MMN15, ½" NPT, stainless steel 1.4571 (316Ti), max. temperature: +120 °C		NBK-03/06
DS	Drain socket DN15	see sketch	NBK-03/06
D2	Drain valve NAD-MMN15, ½" NPT, horizontally mounted, stainless steel 1.4571 (316Ti), max. temperature: +120 °C		NBK-03/06
D3	Drain valve NAD-MMR15, G ½, horizontally mounted, stainless steel 1.4571 (316Ti), max. temperature: +120 °C		NBK-03/06
RF	Dead space free version DN25, stainless steel 1.4571 (pressure rating as process flange)		NBK-06
RA	Dead space free version 1" ASME, stainless steel 1.4571 (316Ti) (pressure rating as process flange)		NBK-03/06
Process connection options			
ST³)	1 x process connection side, 1 process connection vertical on top	see sketch	NBK-03/06/07/10
TS³)	1 x process connection side, 1 process connection vertical at bottom	see sketch	NBK-03/06/07/10
TT³)	2 x process connection vertical, up to DN25 or 1" ASME	see sketch	NBK-03/06/07/10
Scales			
(Ball displays are always delivered with scales, see technical data/ sketch for resolution)			
MV	Scale made of stainless steel 1.4301 (only with ball display model KP/KM/KF, standard with model KG)	see sketch	NBK-03/06/07/10/31/32/33
M1	Measuring scale, medium temperature -40 °C ... +400 °C, engraved scale made of aluminium	see sketch	NBK-03/06/07/10/31/32/33
M2	Measuring scale, medium temperature -40 °C ... +150 °C, scale backing made of aluminium with polyester foil	see sketch	NBK-03/06/07/10/31/32/33
Thermal screening			
N	Thermal screening for sensor	see sketch	NBK-03/06/07/10/31/32/33
Heating jacket			
L1	Connection for heating jacket DN15/PN16 Form B1 DIN-EN 1092-1	see sketch	NBK-03/06/07/10
L2	Connection for heating jacket DN20/PN16 Form B1 DIN-EN 1092-1		NBK-03/06/07/10
L3	Connection for heating jacket DN25/PN16 Form B1 DIN-EN 1092-1		NBK-03/06/07/10
L4	Connection for heating jacket DN32/PN16 Form B1 DIN-EN 1092-1		NBK-03/06/07/10
LA	Connection for heating jacket ½" Class 150 RF ASME B16.5-2003 (Class 300 flanges on request)		NBK-03/06/07/10
LB	Connection for heating jacket ¾" Class 150 RF ASME B16.5-2003 (Class 300 flanges on request)		NBK-03/06/07/10
LC	Connection for heating jacket 1" Class 150 RF ASME B16.5-2003 (Class 300 flanges on request)		NBK-03/06/07/10
LD	Connection for heating jacket 1¼" Class 150 RF ASME B16.5-2003 (Class 300 flanges on request)		NBK-03/06/07/10



Bypass Level Indicators Model NBK-03/-06/-07/-10/-31/-32/-33

Code	Description	Sketch/picture	Availability
Electrical Outputs			
MU	Option M with connection box at bottom, for easy access to connection box		NBK-03/06/07/10/31/32/33
MS	Option M and connection box at 100 mm distance, max. medium temperature = + 300 °C (Thermal screening option N mandatory with this option)		NBK-03/06/07/10/31/32/33
MK	Option M and connection box 5000 mm silicone cable, max. medium temperature = + 400 °C (Thermal screening option N mandatory with this option)		NBK-03/06/07/10/31/32/33
Display options			
AE	Aluminium die-cast housing, LED digital display, connection box at bottom (only in combination with transmitter option A)		NBK-03/06/07/10/31/32/33
AC	Aluminium die-cast housing, LCD digital display, connection box at bottom (only in combination with transmitter option A)	as AE, however with LCD display	NBK-03/06/07/10/31/32/33
HE	Aluminium die-cast housing, LED digital display, connection box at bottom (only in combination with transmitter option H)		NBK-03/06/07/10/31/32/33
HC	Aluminium die-cast housing, LCD digital display, connection box at bottom (only in combination with transmitter option H)	as HE, however with LCD display	NBK-03/06/07/10/31/32/33
C²⁾	Indicating unit ADI-1 with bargraph and digital display, rugged aluminium housing, mounted at bypass tube, for description see data sheet ADI-1	see cover page / sketch	NBK-03/06/07/10/31/32/33
Additional options			
A	Connection flange for 2-part version (not possible with sensor), split roller display and scale possible	see sketch	NBK-03/06/07/10
HL	Retaining plate, centric between process connections, necessary from L > 5000 mm (alternative option HF)	see sketch	NBK-03/06/07/10/31/32/33
HF	Retaining flange, centric between process connections, necessary from L > 5000 mm (alternative option HL)	see sketch	NBK-03/06/07/10/31/32/33
K	Armaflex-insulation (heat co-efficient 0.025 kcal/m °C, up to 105 °C)	-	NBK-03/06/07/10
Tests / certificates			
P	Radiographic examination DIN 54 111 T1	-	NBK-03/06/07/10/31/32/33
Q	Dye penetration test DIN EN 571-1	-	NBK-03/06/07/10/31/32/33
X	Pressure test with water 1.5 x PN	-	NBK-03/06/07/10/31/32/33
Z	3.1 Inspection certificate acc. EN 10204	-	NBK-03/06/07/10/31/32/33
MR	Material acc. to NACE MR 0103/ISO15156 (MR0175), declaration of conformance	-	NBK-03/06/07/10/31/32/33
WV	Positive Material Identification (PMI)	-	NBK-03/06/07/10/31/32/33
SF	Oil and fat free	-	NBK-03/06/07/10/31/32/33

¹⁾ Not possible with transmitter options H/F


²⁾ Only possible with option T (magnetostrictive sensor or option M (reed chain with transmitter)

³⁾ Not possible with option T


Note: Please pay attention to max. permissible temperature limits of individual components

Sketches of selected options

Option DS

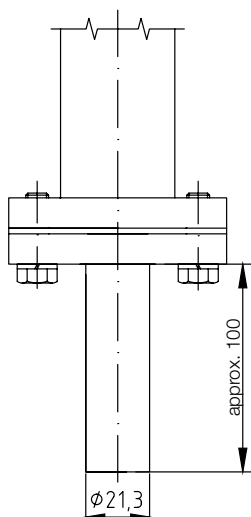


Option RF/RA

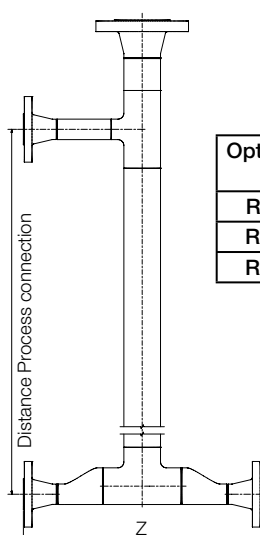


Option	Process connection below	Dimension Z
RF	V-flange DN25 PN40	approx. 360
RA	V-flange CI 150 1"	approx. 390
RA	V-flange CI 300 1"	approx. 405


Option TT

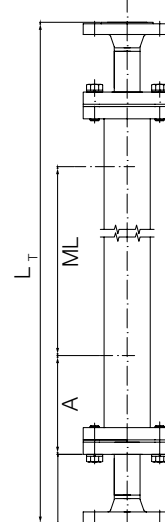


Option ST

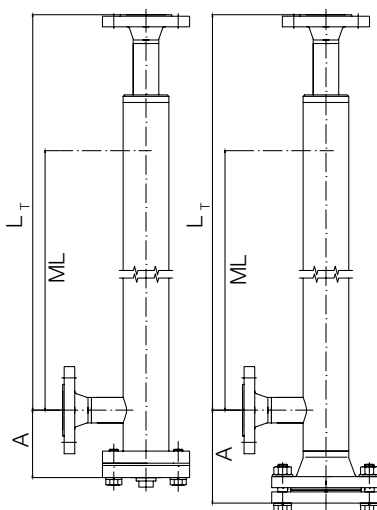

Option TS

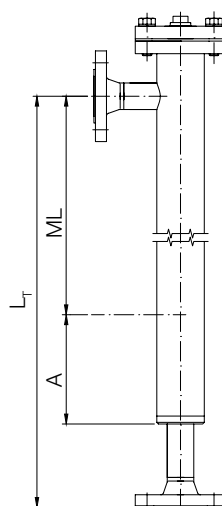


Option A

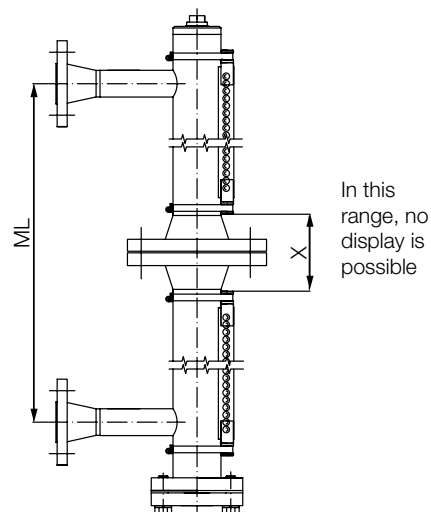

Model	Dimension X
NBK-03	92
NBK-06	98
NBK-07	127
NBK-10	139


Option HL

(centred to dimens. L)




Option HF

(centred to dimens. L)




Options process connection


Option F/A



Option R/N




Option S

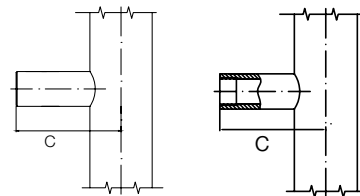

Measuring scale, aluminium


Option M1 - engraved scale

Option M2 - polyester foil

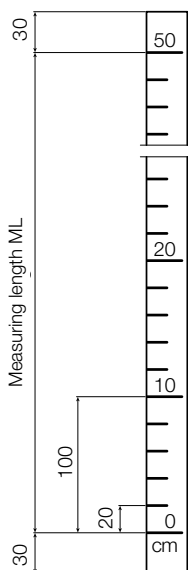

Measuring scale screen print, stainless steel carrier

(standard scope of supply with ball display)

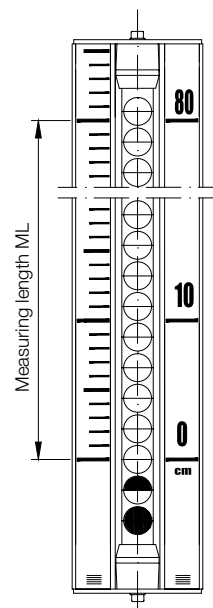

Float models (closed design)

Model	Min. density [kg/dm ³]	Material
A	1.0	titanium
B	0.9	titanium
C	0.8	titanium
D	0.7	titanium
E	0.6	titanium
F*	0.54	titanium
V	1.0	stainless steel
W	0.8	stainless steel
H	0.8	CF340
Interface float	min. density difference = 150 kg/dm ³ (indicate both densities)	titanium

*Option N not possible. Not for NBK-10, special float for special medium densities (taring) or reduced length A on request.

Order Details (Example: NBK-03 F15 00 0 A)

Model	Rated pressure	Connection	Nominal size	Roller / ball indicator	Sensor/ Transmitter	Medium density float	Options
NBK-03...	PN16/ Class 150	F = DIN-flange A = ASME-flange R ³⁾ = R-male thread N ³⁾ = NPT-male thread S ⁴⁾ = welding-nipple	15 = DN 15, ½" 20 = DN 20, ¾" 25 = DN 25, 1" 32 = DN 32, 1¼" 40 = DN 40, 1½" 50 = DN 50, 2" XX ⁸⁾ = special connection	00 = without RP = POM-roller RK = ceramic roller KP = ball display with Plexiglas® sight tube KM = ball display with Makrolon® sight tube KF = as KM however with oil filling KG = ball display with borosilicate sight tube	0 = without transmitter T = magnetostrictive probe/4 ...20 mA, 4-wire W = reed chain/without transmitter M = reed chain/4 ...20 mA, 2-wire A ⁹⁾ = reed chain/4 ...20 mA, 2-wire H = reed chain/4 ...20 mA, HART®, 2-wire D ¹¹⁾ = magnetostrictive probe / 4 ...20 mA, 2-wire, 1 mm J ¹¹⁾ = magnetostrictive probe / 4 ...20 mA HART®, 2-wire, 1 mm I ¹²⁾ = magnetostrictive probe / 4 ...20 mA HART®, 2-wire, 1 mm, 1 mm, DIN plug	A = 1.0 kg/dm³, titanium for viscosity up to 200 cP B = 0.90 kg/dm³, titanium for viscosity up to 200 cP C = 0.80 kg/dm³, titanium for viscosity up to 200 cP D = 0.70 kg/dm³, titanium for viscosity up to 200 cP E = 0.60 kg/dm³, titanium for viscosity up to 200 cP F ⁶⁾ = 0.54 kg/dm³, titanium for viscosity up to 200 cP V ⁵⁾ = 1.0 kg/dm³, stainless steel for viscosity up to 460 mm²/s W ⁵⁾ = 0.8 kg/dm³, stainless steel for viscosity up to 460 mm²/s Y = special density, titanium specify in clear text)	0 = without options or options as in list and description (see separate options list)
NBK-06...	PN40/ Class 300						
NBK-07...	PN63/ Class 400						
NBK-10...	PN 100/ Class 600						
NBK-31	PN 160/ Class 900	F = DIN flange A = ASME flange	15 = DN 15, ½" 20 ⁷⁾ = ¾" 25 = DN 25, 1"			H = high pressure floater, CF340 viscosity up to 200 cP (medium S.G.: ≥ 0.8; specify in clear text)	
NBK-32	PN 250/ Class 1500						
NBK-33	PN 320						
NBK-R	Standard limit contact (bistable change-over contact)						
NBK-RV200NO	Limit contact, bistable, N/O, max. +200 °C (suitable for vessels with strong vibrations)						
NBK-RV200NC	Limit contact, bistable, N/C, max. +200 °C (suitable for vessels with strong vibrations)						
NBK-RN200NO	Limit contact, bistable, NAMUR, N/O, max. +200 °C (suitable for vessels with strong vibrations)						
NBK-RN200NC	Limit contact, bistable, NAMUR, N/C, max. +200 °C (suitable for vessels with strong vibrations)						
NBK-RS01U03 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +120 °C, 3 m silicone cable, weight: 505 g						
NBK-RS01U06 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +120 °C, 6 m silicone cable, weight: 826 g						
NBK-RS01U10 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +120 °C, 10 m silicone cable, weight: 1254 g						
NBK-RH01U03 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +350 °C, 3 m silicone cable, weight: 580 g						
NBK-RH01U06 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +350 °C, 6 m silicone cable, weight: 901 g						
NBK-RH01U10 ¹⁰⁾	Limit contact, bistable, change-over contact, max. +350 °C, 10 m silicone cable, weight: 1329 g						

³⁾ Only possible with nominal diameter code 15/20/25/32 (female thread on request) ⁴⁾ Only possible with NBK-03/06 and nominal size code 15/20/25/32

⁵⁾ Only possible with NBK-03 ⁶⁾ Not possible with NBK-10 ⁷⁾ Only possible for connection A, ASME ⁸⁾ Specify in clear text ⁹⁾ Only with options AE and AC


¹⁰⁾ Add Suffix „NBK“, when ordered together with NBK ¹¹⁾ Model NMB-TR00UAXx2(4)0 (see separate data sheet for model NMB). Not possible with NBK-31/-32/-33

¹²⁾ Model NMS-S000UExxM0 (see separate data sheet for model NMS). Not possible with NBK-31/-32/-33

Measuring length L, density and temperature please specify in clear text!


Dimensions [mm]

NBK-03/06/07/10 with roller indicator/ball display

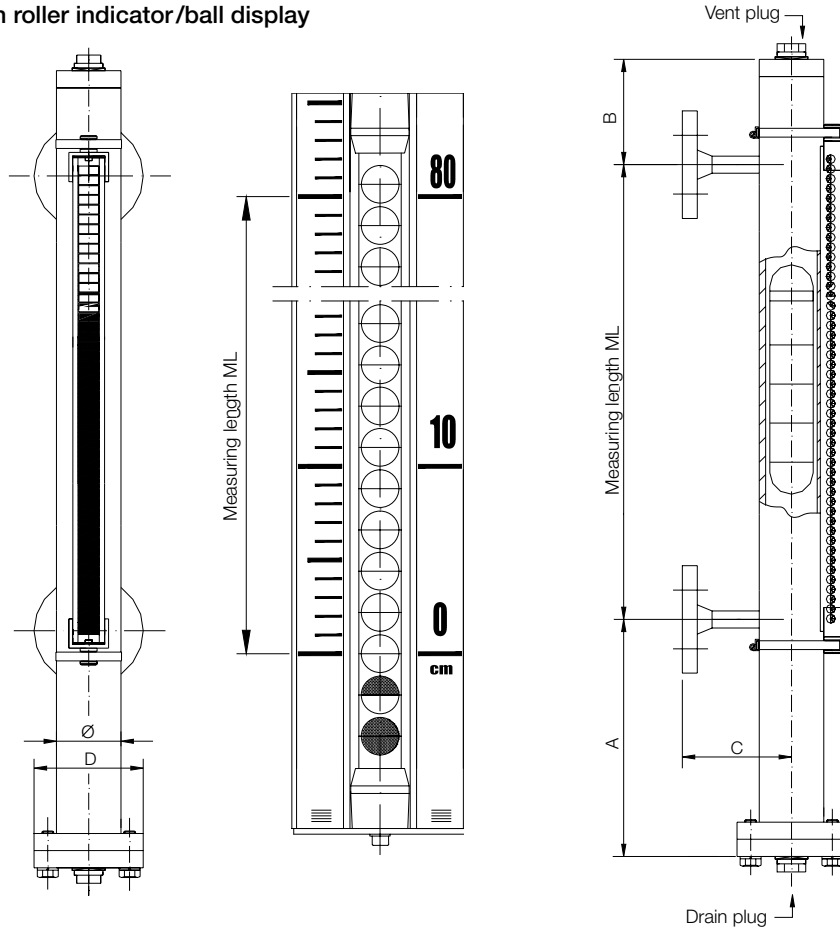

Dimensions NBK [mm]

Model	Rated pressure	Ø	B	D	x15...x25	x32	C			
							F40	A40	F50	A50
NBK-03...	PN 16	60.3	130	115	110	110	130	-	140	-
	Class 150						-	145	-	160
NBK-06...	PN 40			180	150	150	130	-	145	-
	Class 300						-	155	-	165
NBK-07...	PN 63			195	150	150	145	-	160	-
	Class 400						-	160	-	175
NBK-10...	PN 100			195	150	150	145	-	165	-
	Class 600						-	160	-	175
NBK-31...	PN 160	71	150	245	180					
	Class 900									
NBK-32...	PN 250	76.1	150	245	180					
	Class 1500									
NBK-33...	PN 320		170	265	210					




Clearance dimension A [mm]

Model	Rated pressure	Medium density					
		0.54 [kg/dm³]	0.6 [kg/dm³]	0.7 [kg/dm³]	0.8 [kg/dm³]	0.9 [kg/dm³]	1 [kg/dm³]
NBK-03...	PN 16 / Class 150	320	320	320	320	320	210
NBK-06...	PN 40 / Class 300	410	410	320	320	320	210
NBK-07...	PN 63 / Class 400	410	410	320	320	320	210
NBK-10...	PN 100 / Class 600	-	700*	410**	320	320	210
NBK-31...	PN 160 / Class 900	-	-	-	540	415	345
NBK-32...	PN 250 / Class 1500	-	-	-	540	415	345
NBK-33...	PN 320	-	-	-	595	460	385

* 800 for units with thermal screening; **450 for units with thermal screening

NBK-31/32/33 with roller indicator/ball display

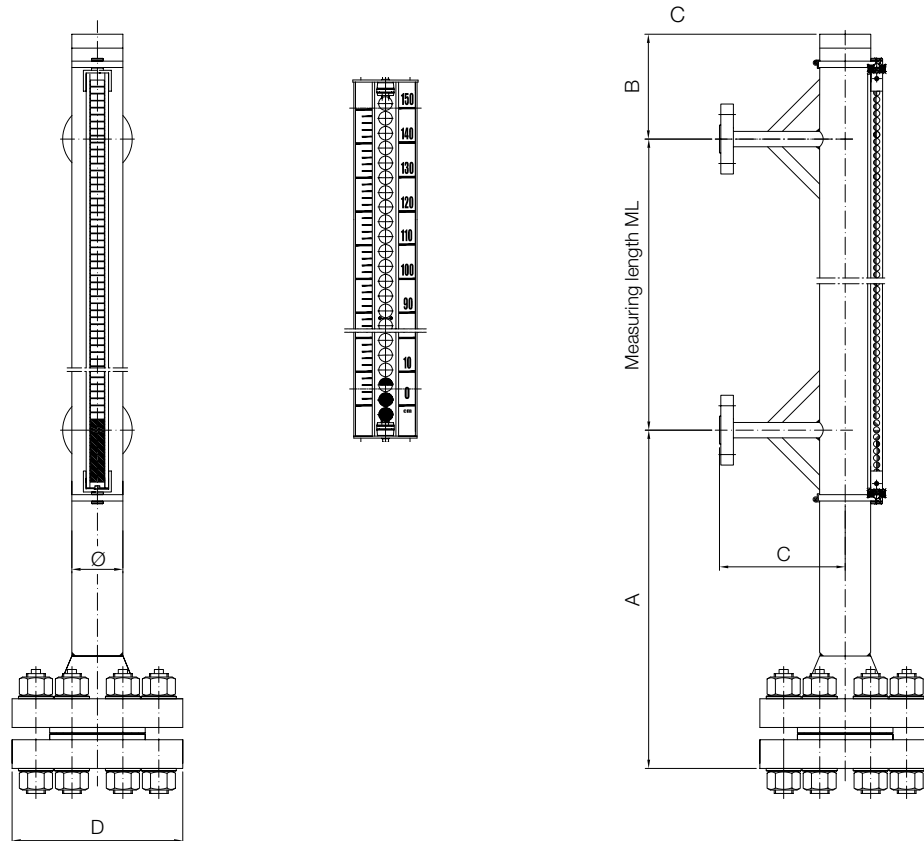

Pressure-/temperature-assignment for flange made of stainless steel

DIN EN 1092-1:2008-09 (extract)									
PN	Material	Maximum allowable temperature TS in °C							
		RT	100	150	200	250	300	350	400
	1.4571 (15E0)	Maximum allowable pressure PS in bar							
6		6.0	6.0	5.8	5.6	5.3	5.0	4.8	4.6
16		16.0	16.0	15.6	14.9	14.1	13.3	12.8	12.4
40		40.0	40.0	39.2	37.3	35.4	33.3	32.1	31.2
63		63.0	63.0	61.8	58.8	55.8	52.5	50.7	49.2
100		100.0	100.0	98.0	93.3	88.5	83.3	80.4	78.0
160		160.0	160.0						
250		250.0	250.0						
320		320.0	320.0						

Remarks:


RT = -10 °C... +50 °C

TS = maximum allowable temperature in °C, temperature which is defined by pressure equipment manufacturer, for which the pressure equipment is designed
 PS = maximum allowable pressure, pressure which is defined by pressure equipment manufacturer, for which the plant is designed. 1.4571 (15E0) was calculated with help of creep resistance values of 100 000 h acc. to EN-Material Norms considering the safety value.



At intermediate temperatures e.g. 120 °C, a linear interpolation is to be carried out between 2 following creep resistance values, e.g. of 100 °C and 150 °C.

The pressure/temperature assignment is valid for the following flange models with sizes up to DN 100 used by KOBOLD.



Model No. and nomination: 05 Blind flange, 11 Welding neck flange

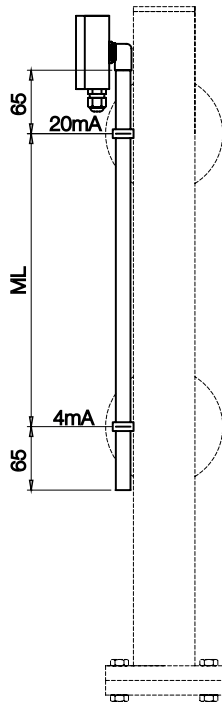NBK-... with
reed chain model W


**NBK-... with
transmitter model M**

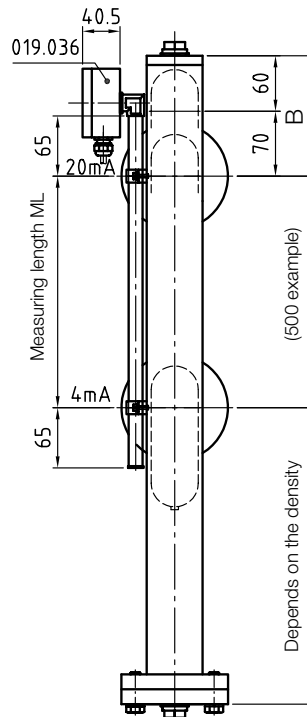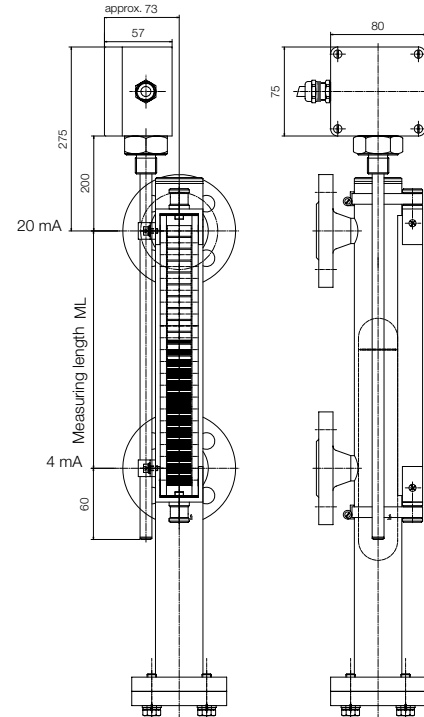NBK-... with
transmitter model T


NBK-... with
transmitter model D/J

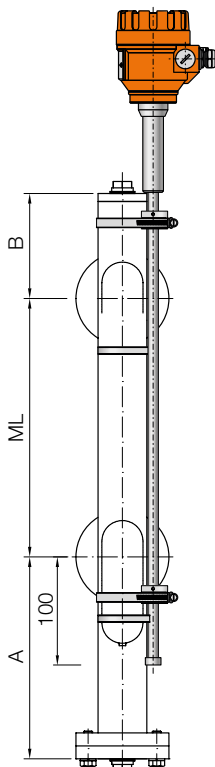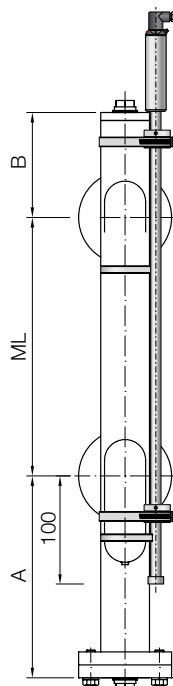NBK-... with
transmitter model I


NBK-... with transmitter options H/F
(not possible with options VA/VF)

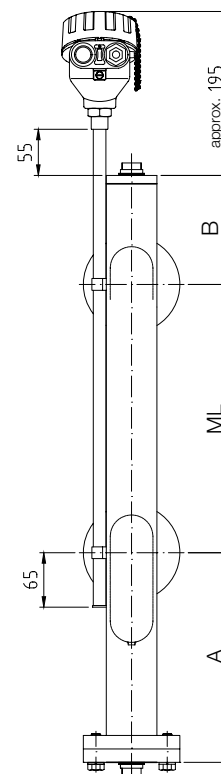


NBK-... with thermal screen option N

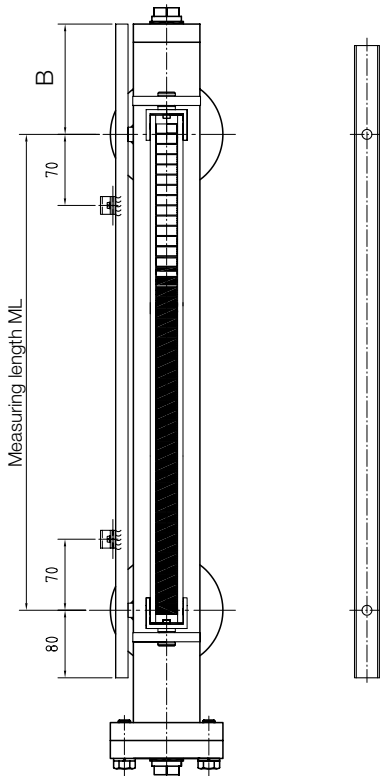


NBK-... with heating jacket option LX

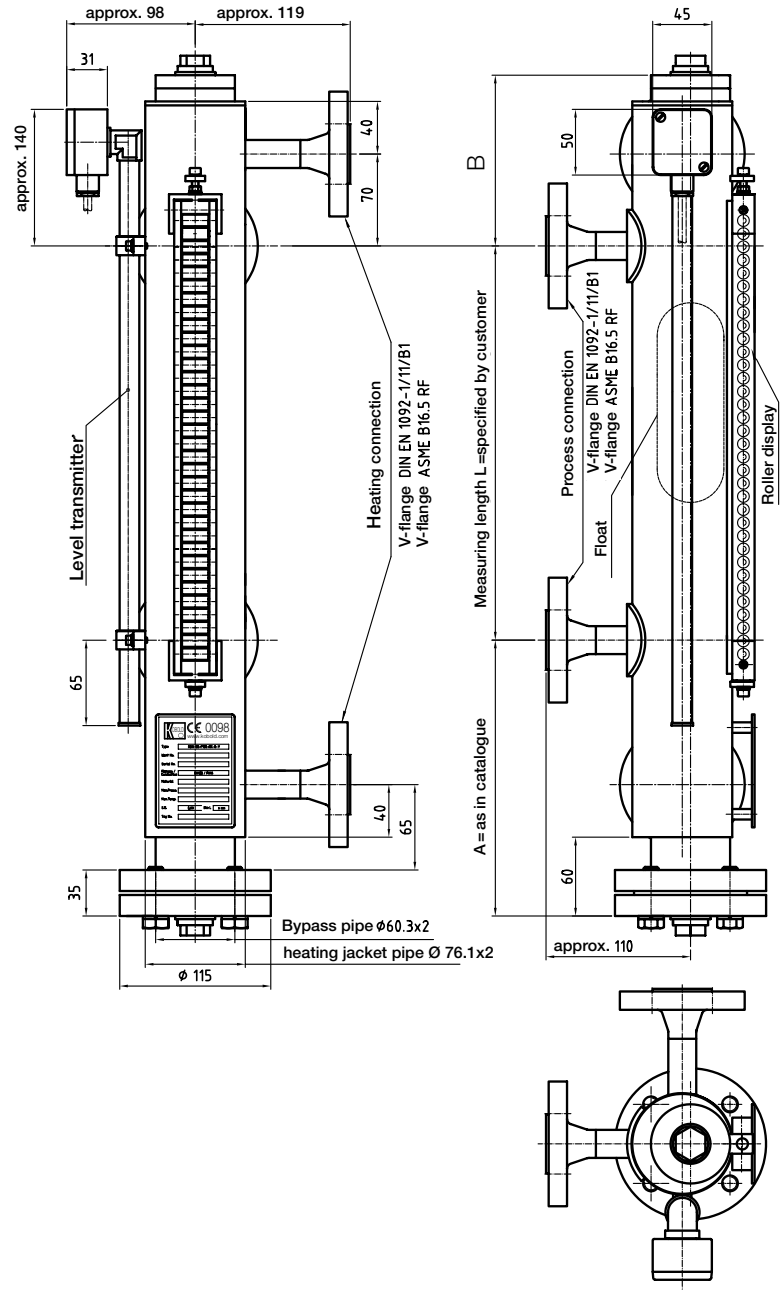


NBK-... with transmitter option MU

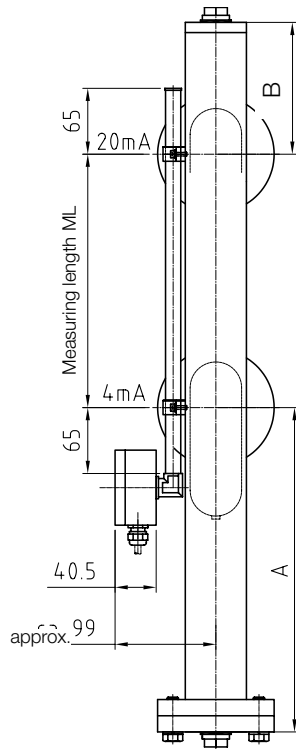


NBK-... with transmitter option MS

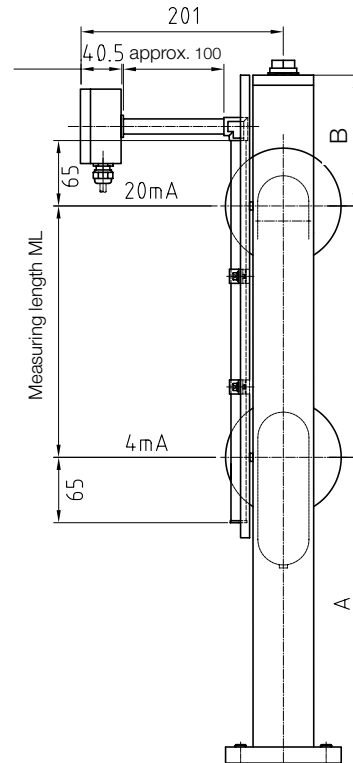


NBK-... with transmitter option MK

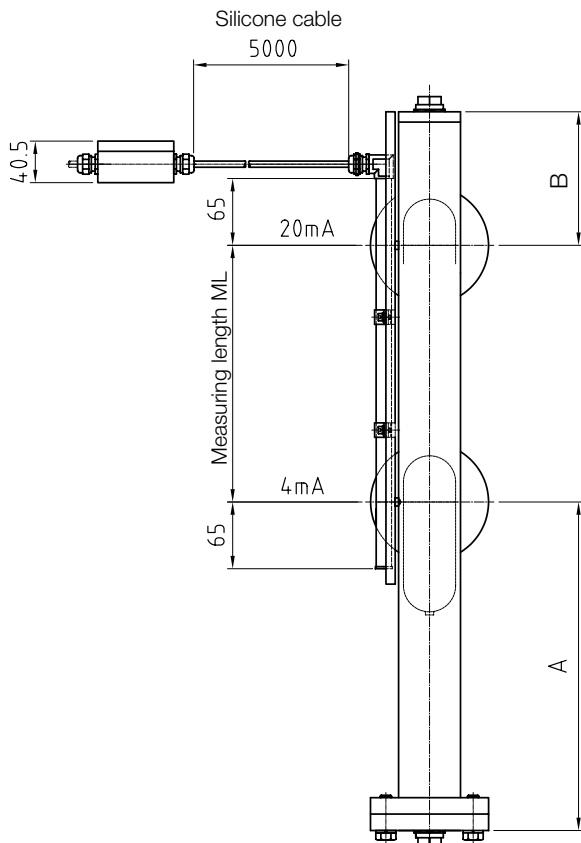


NBK-... with transmitter display options AE/HE or AC/HC

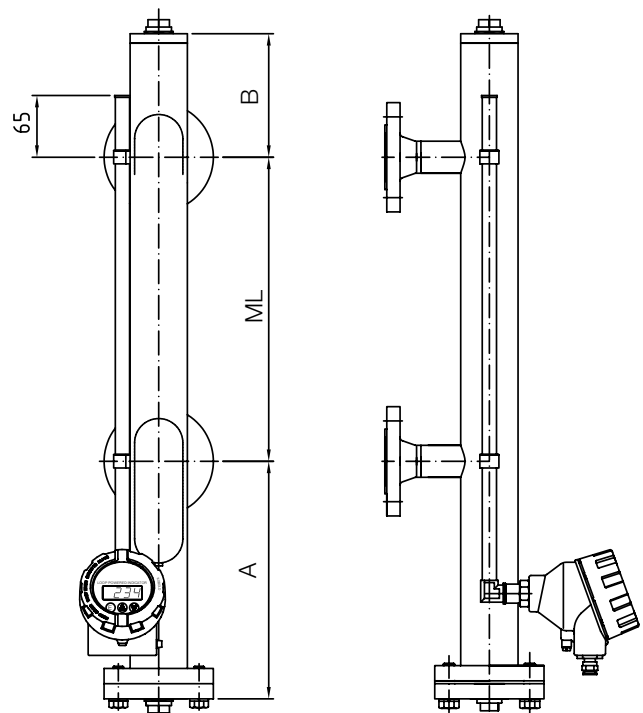


Process connection option ST

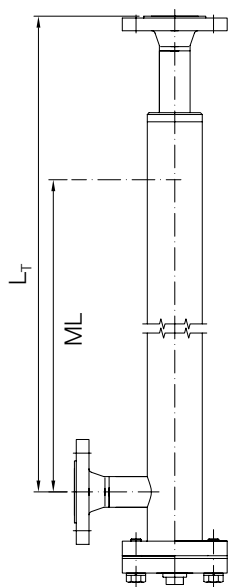


NBK... with transmitter model M option ST

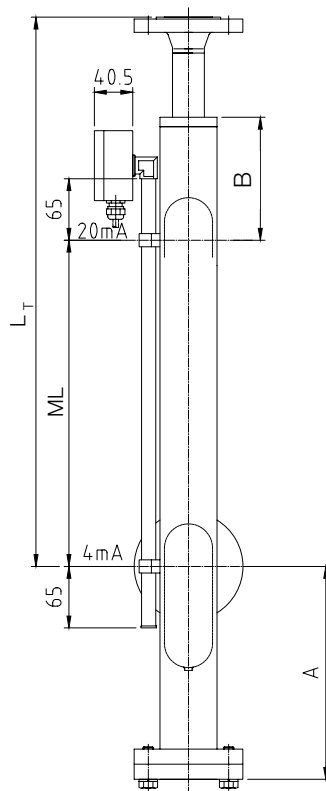


NBK... with transmitter model H/F option ST

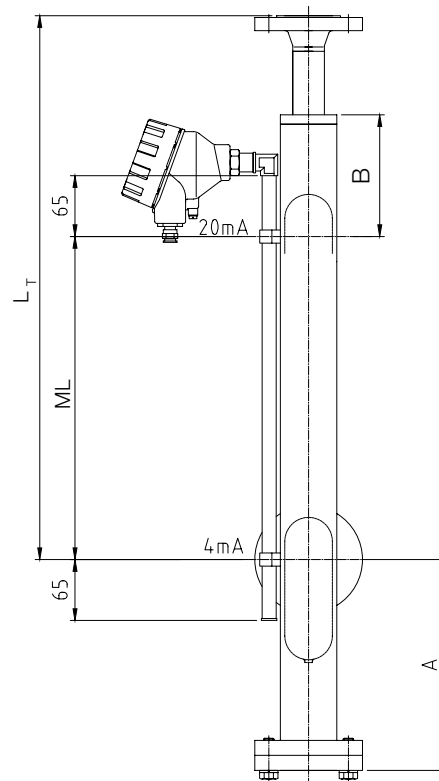


NBK... with transmitter options MU and ST

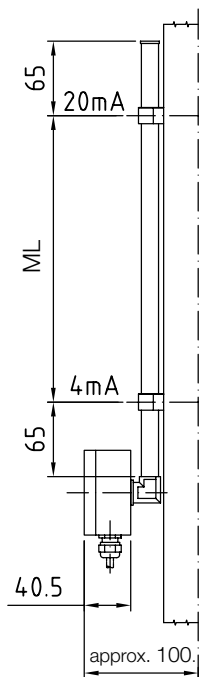


NBK... with transmitter options MS and ST

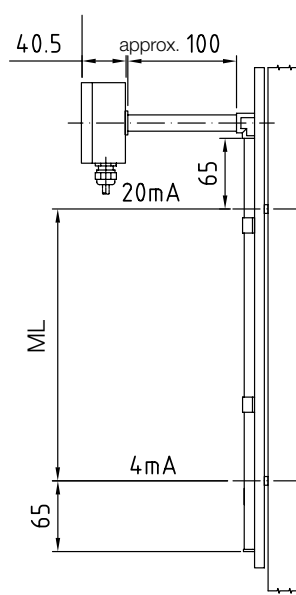


NBK... with transmitter options MK and ST

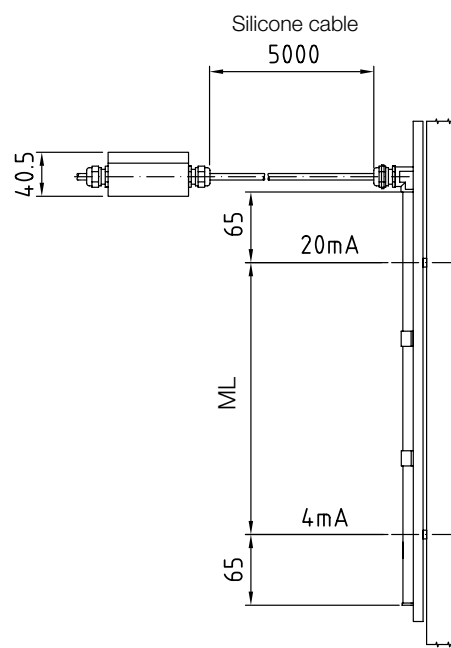


NBK-... with transmitter
display options AE/HE or AC/HC and option ST

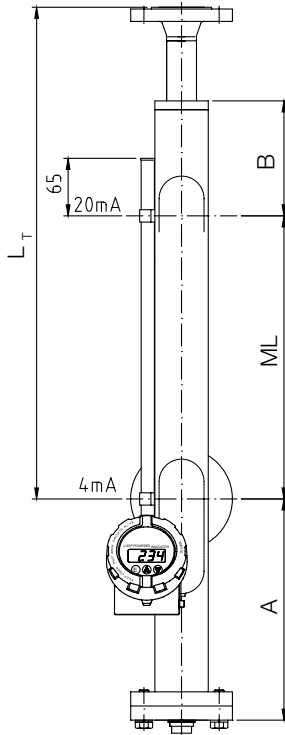


Process connection
option TT

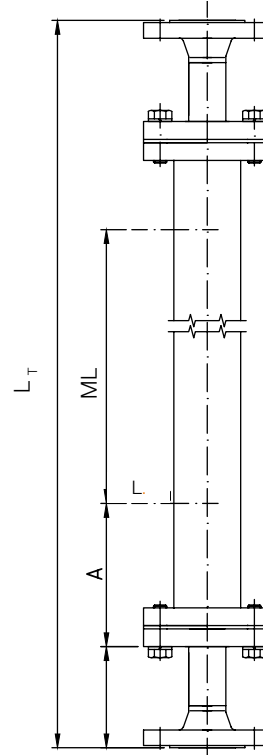


NBK-... with transmitter
model M option TT

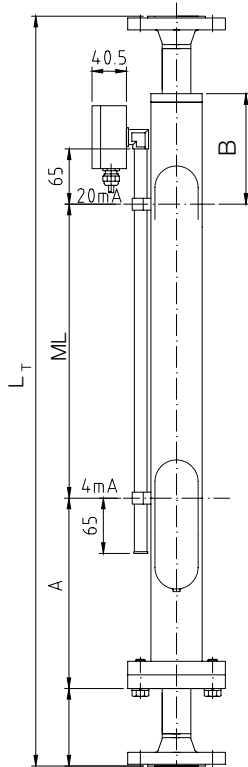


NBK-... with transmitter
model H/F option TT

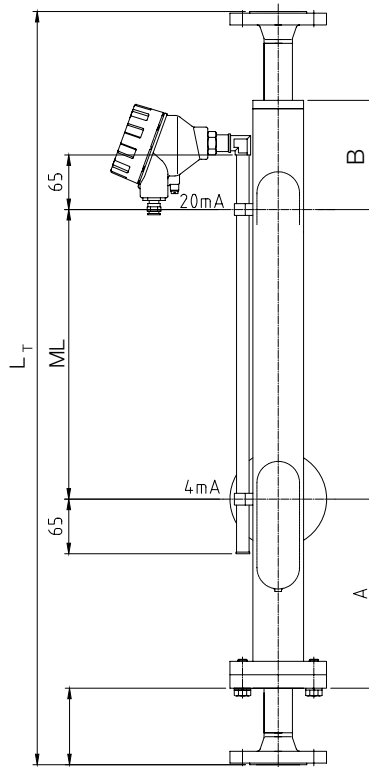


NBK-... with transmitter
options MU and TT

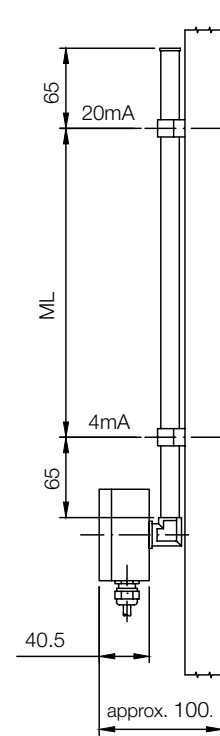


NBK-... with transmitter options MS and TT

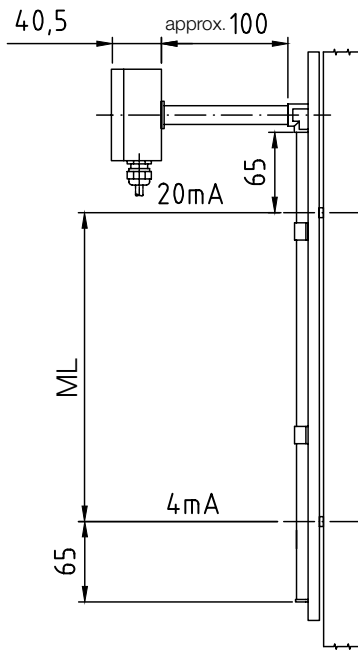


NBK-... with transmitter options MK and TT

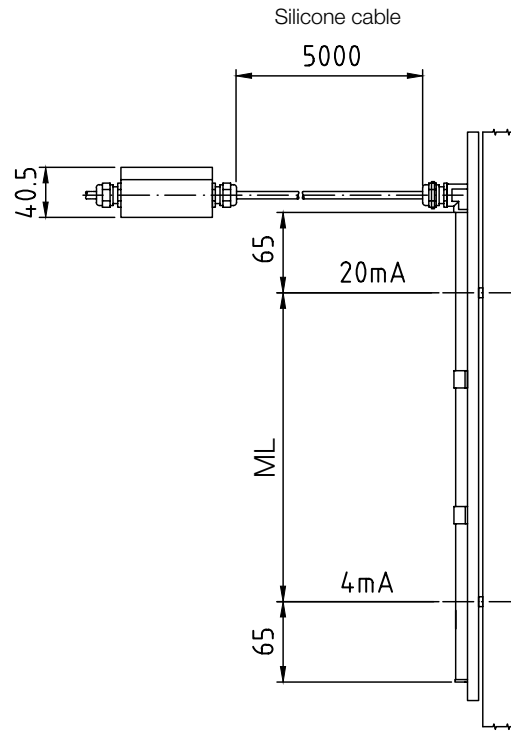


NBK-... with transmitter display options AE/HE or AC/HC and option TT

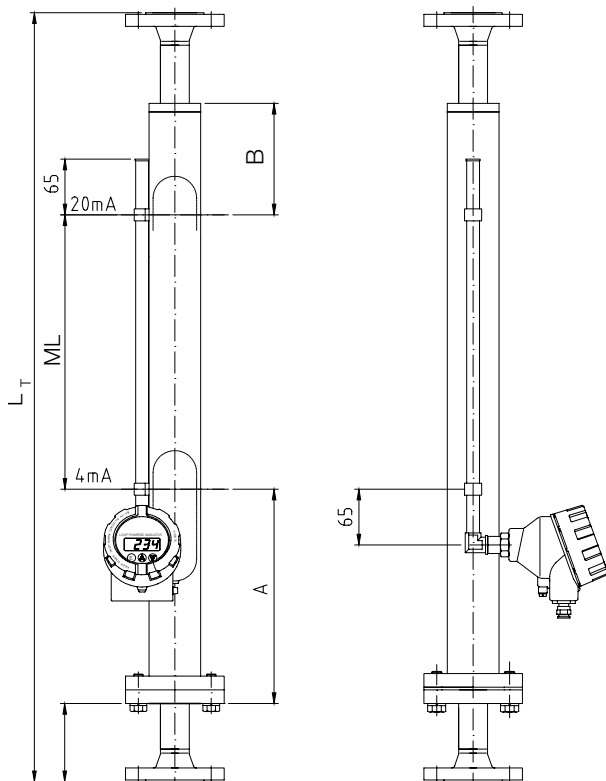


NBK-... with indicating unit ADI-1, option C

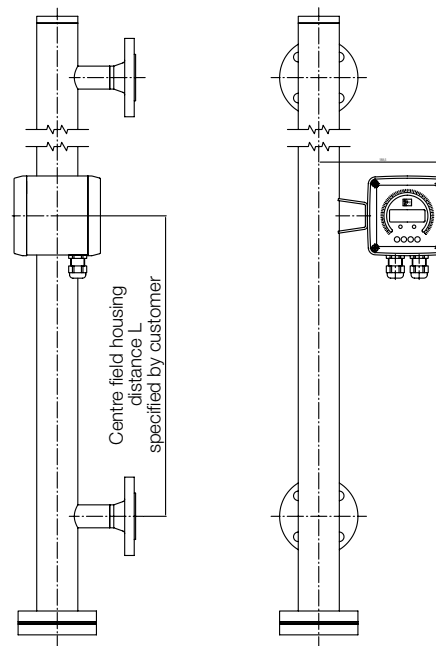


NBK-R

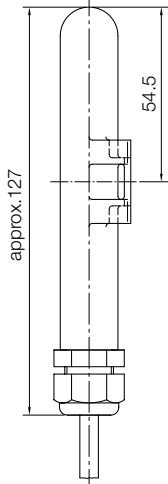

NBK-RV/RN

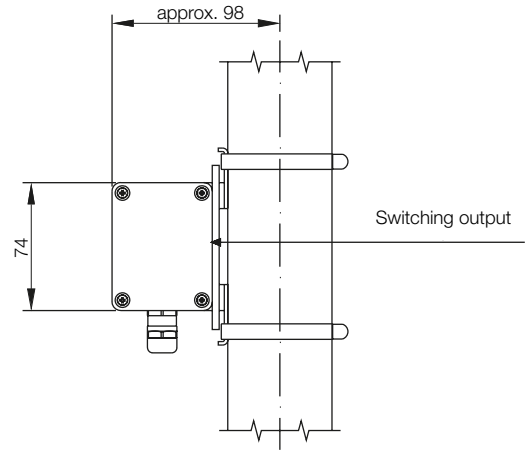

NBK-RS

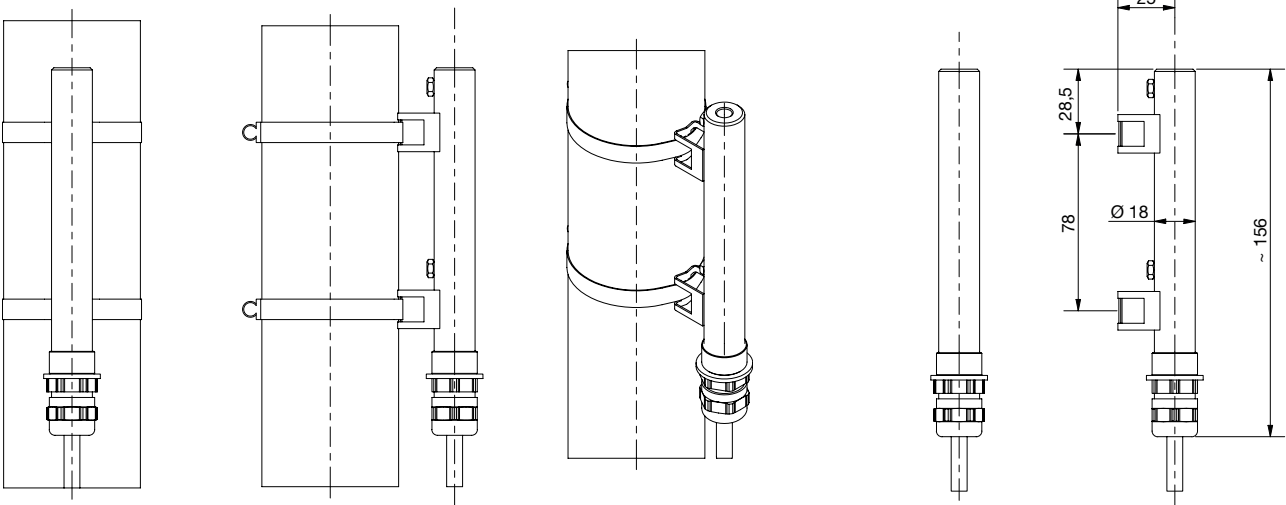

NBK-RH

